

(19) World Intellectual Property
Organization
International Bureau



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

PCT

(10) International Publication Number
WO 2005/072604 A1

(74) Agent: GARRETT, Arthur, S.; Finnegan, Henderson, Farabow, Garrett & Dunner LLP 901 New York Avenue, NW, Washington, DC 20001-4413 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(30) Priority Data:

10/764,974 26 January 2004 (26.01.2004) US

(71) Applicant (for all designated States except US): HOME
DIAGNOSTICS, INC. [US/US]; 2400 N.W. 55th Court,
Fort Lauderdale, FL 33309 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): NEEL, Gary, T. [US/US]; 1520 BlueJay Circle, Weston, FL 33327 (US).
 ROUNDS, George, R. [US/US]; 41 Knollcrest Drive, Brookfield, CT 06804 (US). HERNANDEZ, Erick, A. [US/US]; 1843 Seville Street, Margate, FL 33063 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(5.4) Title: MEDICAL DIAGNOSTIC TESTING DEVICE WITH VOICE MESSAGE CAPABILITY

(57) **Abstract:** A medical diagnostic testing device is provided with a voice message capability to record one or more voice messages associated with a test result. When a stored test result is retrieved and displayed, the medical diagnostic testing device also plays the one or more recorded voice messages associated with the stored test result.

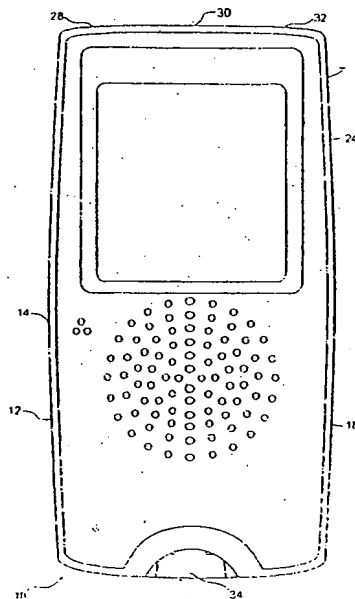

WO 2005/072604 A1

WO 2005/072604 A1

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

MEDICAL DIAGNOSTIC TESTING DEVICE WITH VOICE MESSAGE CAPABILITY

BACKGROUND

1. Field of the Invention

The present invention relates to the field of medical diagnostic testing devices and, more particularly, to a medical diagnostic testing device with a voice message capability.

2. Description of Related Art

Currently, medical diagnostic testing devices, such as blood glucose meters, store test results, such as blood glucose readings, which a user or medical professional can later retrieve and review. However, in order to properly interpret test results that are reviewed at a later time, it is often helpful to have information regarding the user's condition at the time the test result was obtained, e.g., what the user had eaten or how much the user had exercised. In one approach, a user could keep track of this information by keeping a journal, e.g., on paper or on a computer. However, this approach can be difficult or inconvenient for many users. For many users, the easiest and most natural way to keep track of information relevant to a test result may be to record a voice message or "memo" when the test result is obtained. However, although medical diagnostic testing devices have been specially designed for the visually impaired to "speak" test results, there remains a need to help users record voice messages that can be used to interpret their test results.

SUMMARY

In a first principal aspect, the present invention provides a method of using a medical diagnostic testing device. In accordance with the method, a test result is obtained using the medical diagnostic testing device. The test result is stored in the medical diagnostic testing device. A voice message, associated with the test result, is recorded in the medical diagnostic testing device.

In a second principal aspect, the present invention provides a medical diagnostic testing device comprising: a testing system for obtaining a test result; a

memory for storing the test result; and an audio system for recording a voice message associated with the test result.

In a third principal aspect, the present invention provides an improvement to a medical diagnostic testing device that obtains and stores test results. The improvement comprises an audio system for recording a voice message associated with a test result.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is front view of a medical diagnostic testing device, in accordance with an exemplary embodiment of the present invention.

Figure 2 is a functional block diagram of the medical diagnostic testing device of Figure 1, in accordance with an exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

The present invention, in exemplary embodiments, relates to a medical diagnostic testing device with a voice message capability. The medical diagnostic testing device is a device, often configured to be hand-held, that is used to conduct one or more types of medical diagnostic tests on one or more types of samples. The sample is typically a biological material, such as blood, urine, or saliva. The test performed on the sample is typically a qualitative or quantitative test to determine the presence of or amount of one or more analytes in the sample. Such analytes could be glucose, cholesterol, human chorionic gonadotropin (HCG), hemoglobin A_{1c}, fructosamine, carbohydrates, tumor markers, lead, anti-epilepsy drugs, bilirubin, liver function markers, toxins or their metabolites, drugs of abuse, blood coagulation factors (PT, APTT), or others. For example, the medical diagnostic testing device could be a glucose meter that determines glucose levels in whole blood samples. Such glucose meters are often used by people with medical conditions, such as diabetes, to monitor their blood glucose levels.

In many cases, the sample, e.g., whole blood, is applied to a carrier or sensor, such as a test strip, to perform the test. The test strip may include one or more reagents, such as glucose oxidase, and/or structures, such as electrodes, for performing a specific type of test or tests in conjunction with a specific type of

medical diagnostic testing device. The medical diagnostic testing device may interact with the test strip to obtain one or more measurements and then determine a test result based on the one or more measurements. The measurements may include optical measurements, which may involve, for example, reflection, transmission, scattering, absorption, fluorescence, or electrochemiluminescence. Examples of optical measurement techniques and systems are disclosed in U.S. Patent Nos. 6,040,195 and 6,284,550 and in U.S. Patent Application No. 09/984,948, filed on October 31, 2001, which are incorporated herein by reference. Alternatively, the measurements may include electrical measurements, which may involve, for example, coulometry, amperometry, or potentiometry. Examples of electrical measurement techniques and systems are disclosed in U.S. Patent Application No. 10/286,648, filed on November 1, 2002 and in U.S. Patent Application No. 10/420,995, filed on April 21, 2003, which are incorporated herein by reference.

When the medical diagnostic testing device determines the test result, it may convey the test result to the user, e.g., by displaying the test result on a display. For example, the medical diagnostic testing device may display a glucose level expressed in terms of mg/dL. The medical diagnostic testing device may also store the test result in a memory. Thus, after obtaining a plurality of test results, the medical diagnostic testing device may have a plurality of test results stored in its memory. The user may be able to selectively retrieve these stored test results. For example, the user may be able to scroll through the plurality of stored test results, with the medical diagnostic testing device displaying each successive test result that it retrieves from its memory.

In accordance with exemplary embodiments of the present invention, the medical diagnostic testing device also includes a voice message capability. For example, when the medical diagnostic testing device obtains a test result, the user may also be able to record one or more voice messages associated with that test result. Thus, when the medical diagnostic device testing device stores the test result, it may also store one or more recorded voice messages, such that they are associated with the test result. For example, a stored test result and its associated voice message(s) may

comprise a "test record" in the medical diagnostic testing device. The user may then be able to selectively retrieve the stored test results, and their associated voice messages, at a later time. Thus, when the medical diagnostic testing device displays a stored test result, as requested by the user, the medical diagnostic testing device may also play the voice message or voice messages associated with the stored test result.

This voice message capability may beneficially allow the user to provide information that relates to the test result. For example, the test results could be blood glucose levels and the voice messages may concern the user's exercise habits, diet, medication, thoughts, feelings, and/or sense of wellness, which may be correlated to blood glucose levels. Thus, when the medical diagnostic testing device displays a high blood glucose level, e.g., 300 mg/dL, the user may record a voice message that explains the high level: "I had two doughnuts for lunch." When the medical diagnostic testing device displays a low blood glucose level, e.g., 80 mg/dL, the user may record a voice message that explains the low level: "I exercised this morning with no breakfast." By displaying stored blood glucose levels and playing the associated voice messages, the user can learn what has helped keep his blood glucose levels under control and what has made his blood glucose levels out of control. Medical professionals could also review the stored blood glucose levels and the associated voice messages to monitor the user's progress and to make appropriate recommendations on how the user could improve.

Figure 1 is a front view of a medical diagnostic testing device 10, and Figure 2 is a functional block diagram thereof, in accordance with an exemplary embodiment. Medical diagnostic testing device 10 may include a housing 12 that is sized and shaped so as to be conveniently held in a typical user's hand. To accommodate voice messaging capability, the front of housing 12 may include a microphone port 14 for audio access to a microphone 16 and a speaker port 18 for audio access to a speaker 20. Medical diagnostic testing device 10 may use microphone 16 to receive voice messages to be recorded, and medical diagnostic testing device 10 may use speaker 20 to play previously recorded voice messages.

The front of housing 12 may also include a window 22 for visual access to a display 24. Display 24 could be a liquid crystal display (LCD) or some other type of display. Medical diagnostic testing device 10 may use display 24 to display information and/or instructions to the user, e.g., in textual, or graphical form. For example, medical diagnostic testing device 10 may use display 24 to display test results.

A user interface 26 may also be mounted on housing 12. User interface 26 may include one or more buttons, keys, switches, controls, touch sensitive surfaces, and/or other components to receive input from the user. Such input may include user instructions for operating medical diagnostic testing device 10. In an exemplary embodiment, the user instructions may include a record instruction, to record a voice message, and a retrieve instruction to retrieve stored test results and their associated recorded voice messages.

To provide the capability of receiving these user instructions, user interface 26 may include buttons 28, 30, and 32, as shown in Figure 1. Button 30 may be used to receive a record instruction. Thus, pressing button 30 may cause medical diagnostic testing device 10 to record a voice message associated with a test result currently being displayed on display 24. The displayed test result could be a test result that medical diagnostic testing device 10 just obtained, or it could be a stored test result that medical diagnostic testing device 10 retrieved in response to a retrieve instruction. Buttons 28 and 32 may be used to receive retrieve instructions. For example, buttons 28 and 32 may be used to scroll up and down, respectively, through an ordered set of stored test results and their associated voice messages. Thus, when button 28 (or button 32) is pressed, medical diagnostic testing device 10 may display on display 24 the previous (or next) stored test result and play through speaker 20 the voice message or messages associated with the stored test result. In an exemplary embodiment, medical diagnostic testing device 10 may order stored test results based on when the test results were obtained, i.e., in chronological order. Alternatively, medical device testing device 10 may order stored test results in other ways.

In addition to, or instead of, record button 30 and scroll buttons 28 and 32, user interface 26 may include other controls. For example, user interface 26 may include a volume control for controlling the volume at which recorded voice messages are played back through speaker 20. User interface 26 may also include one or more controls for turning the voice message recording and/or playback features on or off.

A test strip interface 34 may be mounted on housing 12. Test strip interface 34 may be used to receive one or more test strips for measurement. Test strip interface 34 may be configured so as to position the test strip appropriately for measurement. Test strip interface may also include various structures for interacting with the test strip, depending on what type of measurements are used. For example, if electrical measurements are used, then test strip interface 34 may include one or more electrical contacts for electrically connecting to one or more corresponding electrical contacts on the test strip.

If optical measurements are used, then test strip interface 34 may include one or more optical components, such as light emitting diodes (LEDs) and/or photodetectors.

As shown in Figure 2, a measurement system 36 may interact with test strips via test strip interface 34 to obtain measurements. Measurement system 36 may, in turn, be coupled to a controller 38. Controller 38 may control measurement system 36 and may determine test results based on the measurements obtained by measurement system 36. The structure of measurement system 36 may depend on the type of measurements that are used. Thus, if electrical measurements are used, then measurement system 36 may include digital-to-analog (D/A) converters, for applying electrical signals to the test strip, via test strip interface 34, based on instructions from controller 38, and analog-to-digital (A/D) converters, for measuring electrical signals from the test strip, via test strip interface 34. If optical measurements are used, then measurement system 36 may control one or more LEDs in test strip interface 34, based on instructions from controller 38, and may include circuitry for measuring electrical signals from one or more photodetectors in test strip interface 34.

Controller 38 may also control many of the other functions of medical diagnostic testing device 10. In an exemplary embodiment, controller 38 includes a processor 40 and a memory 42. Memory 42 may include volatile memory, such as RAM, and/or non-volatile memory, such as flash memory. Memory 42 may store data, such as test results. Memory 42 may also store machine language instructions, i.e., software or firmware programming, that are executed by processor 40 to control the functioning of controller 38. Such programming may include one or more algorithms by which controller 38 determines test results based on the measurements from measurement system 36. In many cases, such algorithms may make use of calibration parameters that are specific for particular lots of test strips. These calibration parameters may be entered into medical diagnostic testing device 10 in various ways and may be stored in memory 42. In one approach, the calibration parameters may be read from a removable memory module or "code chip" that the user inserts into medical diagnostic testing device 10 to read a particular lot of test strips. Thus, medical diagnostic testing device 10 may include a code chip interface 44, coupled to controller 38, for receiving such removable memory modules or "code chips."

Controller 38 may be coupled to display 24 to display information such as test results. Controller 38 may also be coupled to user interface 26 so as to be able to receive user instructions such as record instructions and retrieve instructions. Controller 38 may control the functioning of medical diagnostic testing device 10, i.e., in accordance with its programming, in response to such user instructions, as described in more detail below. Controller 38 may also be coupled to a data port 46 for communicating with external devices. For example, medical diagnostic testing device 10 may upload or download test results, voice messages, and/or user instructions via data port 46.

To enable voice message capability, medical diagnostic testing device 10 may include a voice recording/playback system 48 for recording voice messages and for playing back previously recorded voice messages. Thus, voice system 48 may be coupled to microphone 16 for receiving voice messages, and voice system 48 may be

coupled to speaker 20, e.g., via an audio amplifier 50, for playing back recorded voice messages. The operations of voice system 48 may be controlled by controller 38, as described in more detail below.

In an exemplary embodiment, voice recording/playback system 48 records and stores voice messages digitally. Thus, voice recording/playback system 48 may include a digital sampler 52 for converting analog voice signals, i.e., voice messages received by microphone 16, into digital samples at a predetermined sampling rate, e.g., at a 4 kHz to 8 kHz sampling rate. Voice recording/playback system 48 may also include digital storage 54 for storing the digital samples from digital sampler 52. Thus, to play back a recorded voice message, the digital samples corresponding to the recorded voice message may be read from digital sampler 52 and provided to speaker 20, e.g., via a low-pass filter (not shown) and audio amplifier 50. In an exemplary embodiment, voice recording/playback system 48 may be provided as an integrated circuit, such as the ISD5108 ChipCorder® voice record and playback integrated circuit, available from Winbond Electronics Corporation America, San Jose, California.

Medical diagnostic testing device 10 may also include a power supply 56. In an exemplary embodiment, power supply 56 includes one or more batteries and may also include a voltage regulator. In some embodiments, power supply 56 may enable medical diagnostic device 10 to be connected to an external source of power. Although Figure 2 shows power supply 56 connected to voice system 48, it is to be understood that power supply 56 may also power controller 38, measurement system 36, display 24, and other components in medical diagnostic testing system 10.

As noted above, controller 38 may control voice recording/playback system 48, e.g., in response to user instructions such as record instructions and retrieve instructions. Thus, when controller 38 determines a test result, e.g., based on measurements from measurement system 36 on a test strip received in test strip interface 34, and displays the test result on display 24 and stores the test result in memory 42, controller 38 may receive a record instruction, e.g., from user interface

26. In response to the record instruction, controller 38 may control voice system 48 so that it records a voice message received by microphone 16.

The beginning, end, and/or duration of a voice message may be defined in various ways. For example, the beginning and end of a voice message may be defined by the user, e.g., by when the user depresses and releases record button 30. As another example, the beginning and end of a voice message may be defined automatically based on voice levels, i.e., based on when the user begins speaking and when the user finishes speaking. Alternatively, other approaches could be used to define the beginnings and ends of voice messages. In some cases, each voice message may have a fixed duration.

In addition to causing voice system 48 to record the voice message, controller 38 may also store an indication in memory 42 that the test result it just obtained and stored has an associated voice message stored at a given location, e.g., an address, in digital storage 54. Alternatively, controller 38 may associate stored test results with voice messages by storing the test results in digital storage 54 with their associated voice messages. Other ways of associating test results with voice messages may also be used so that a test result and the one or more voice messages associated with it may be treated as part of the same test record. In this way, when controller 38 retrieves a stored test result, controller 38 may also locate the one or more voice messages associated with the stored test result.

For example, when controller 38 receives a retrieve instruction, e.g., from user interface 26, controller 38 may retrieve a stored test result from memory 42 along with information regarding the locations of any associated voice messages that may be stored in digital storage 54. Controller 38 may then display on display 24 the stored test result that it retrieved, and controller 38 may also use the location information it retrieved with the stored test result to cause voice system 48 to play on speaker 20 the one or more recorded voice messages associated with the stored test result.

In addition to recording and playing back voice messages associated with test results, voice system 48 may perform other functions. For example, voice system 48

may have a more general voice message capability to allow the user to record and playback voice messages that are not associated with a particular test result. In another example, voice system 48 may be provided with pre-recorded voice messages. Such pre-recorded voice messages could, for example, serve as voice instructions to the user, such as how to use, set up, and/or troubleshoot medical diagnostic testing device 10. Voice system 48 may also include a speech recognition capability to recognize spoken instructions from the user. Voice system 48 could also be provided with other voice-related functions and capabilities.

Preferred embodiments of the present invention have been described above. Those skilled in the art will understand, however, that changes and modifications may be made to these embodiments without departing from the true scope and spirit of the invention, which is defined by the claims.

CLAIMS

What is claimed is:

1. A method of using a medical diagnostic testing device, said method comprising:
 - obtaining a test result using said medical diagnostic testing device;
 - storing said test result in said medical diagnostic testing device; and
 - recording a voice message, associated with said test result, in said medical diagnostic test device.
2. The method of claim 1, wherein obtaining a test result using said medical diagnostic testing device comprises:
 - applying a sample to a test strip;
 - said medical diagnostic testing device interacting with said test strip, with said sample applied thereto, to obtain at least one measurement; and
 - determining said test result based on said at least one measurement.
3. The method of claim 2, wherein said sample is whole blood.
4. The method of claim 3, wherein said test result is a glucose level in said sample.
5. The method of claim 2, wherein said at least one measurement includes an optical measurement.
6. The method of claim 2, wherein said at least one measurement includes an electrical measurement.
7. The method of claim 1, further comprising:
 - said medical diagnostic testing device displaying said test result.
8. The method of claim 1, further comprising:
 - said medical diagnostic testing device displaying a stored test result.
9. The method of claim 1, further comprising:
 - said medical diagnostic testing device playing a recorded voice message.
10. The method of claim 1, further comprising:
 - said medical diagnostic testing device receiving a retrieve instruction; and

in response to said retrieve instruction, said medical diagnostic testing device displaying a stored test result and playing a recorded voice message associated with said stored test result.

11. The method of claim 1, wherein recording a voice message comprises:
receiving said voice message;
converting said voice message into digital samples; and
storing said digital samples.
12. A medical diagnostic testing device, comprising:
a testing system for obtaining a test result;
a memory for storing said test result; and
an audio system for recording a voice message associated with said test result.
13. The medical diagnostic testing device of claim 12, further comprising:
a test strip interface for receiving a test strip.
14. The medical diagnostic testing device of claim 13, wherein said testing system comprises:
a measurement system for interacting with said test strip, with a sample applied thereto, to obtain at least one measurement; and
a controller for controlling said measurement system, said controller determining said test result based on said at least one measurement.
15. The medical diagnostic testing device of claim 14, wherein said sample is whole blood.
16. The medical diagnostic testing device of claim 15, wherein said test result is a glucose level in said sample.
17. The medical diagnostic testing device of claim 14, wherein said at least one measurement includes an optical measurement.
18. The medical diagnostic testing device of claim 14, wherein said at least one measurement includes an electrical measurement.
19. The medical diagnostic testing device of claim 12, further comprising a display for displaying said test result.

20. The medical diagnostic testing device of claim 12, wherein said audio system comprises:

- a microphone for receiving said voice message;
- a digital sampler to provide digital samples of said voice message; and
- digital storage for storing said digital samples of said voice message.

21. The medical diagnostic testing device of claim 20, wherein said audio system further comprises:

- a speaker for playing said voice message stored in said digital storage.

22. The medical diagnostic testing device of claim 12, further comprising a user interface for receiving at least one user instruction for operating said medical diagnostic testing device.

23. The medical diagnostic testing device of claim 22, wherein said at least one user instruction includes a record instruction, wherein said medical diagnostic testing device records said voice message in response to said record instruction.

24. The medical diagnostic testing device of claim 22, wherein said at least one user instruction includes a retrieve instruction, wherein said medical diagnostic testing device displays a stored test result and plays a recorded voice message associated with said stored test result in response to said retrieve instruction.

25. In a medical diagnostic testing device that obtains and stores test results, the improvement comprising:

- an audio system for recording a voice message associated with a test result.

26. The improvement of claim 25, wherein said audio system includes a microphone for receiving said voice message.

27. The improvement of claim 26, wherein said audio system includes digital storage for digitally storing a recorded voice message.

28. The improvement of claim 27, wherein said audio system includes a speaker for playing said recorded voice message.

29. The improvement of claim 25, further comprising:

a user interface for receiving a record instruction, wherein said medical diagnostic testing device records said voice message in response to said record instruction.

30. The improvement of claim 25, further comprising:

a user interface for receiving a retrieve instruction, wherein said medical diagnostic testing device displays a stored test result and plays a recorded voice message associated with said stored test result in response to said retrieve instruction.

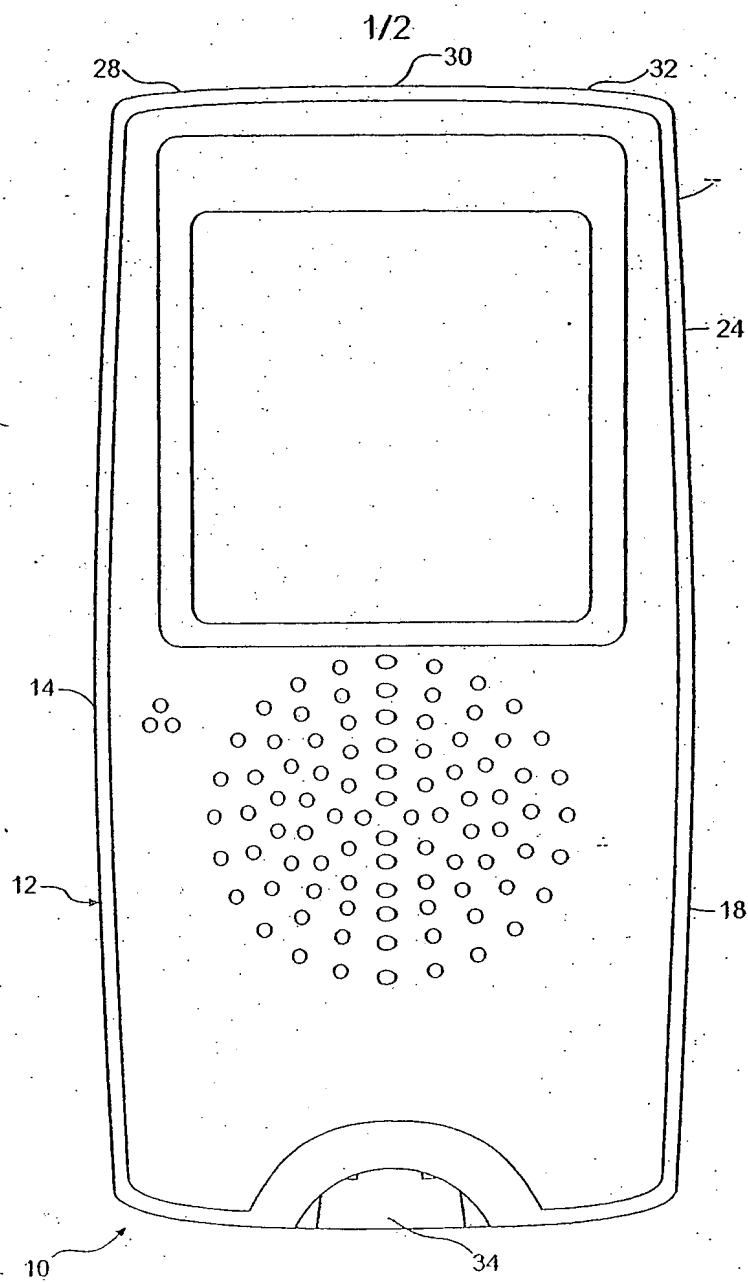


FIG. 1

2/2

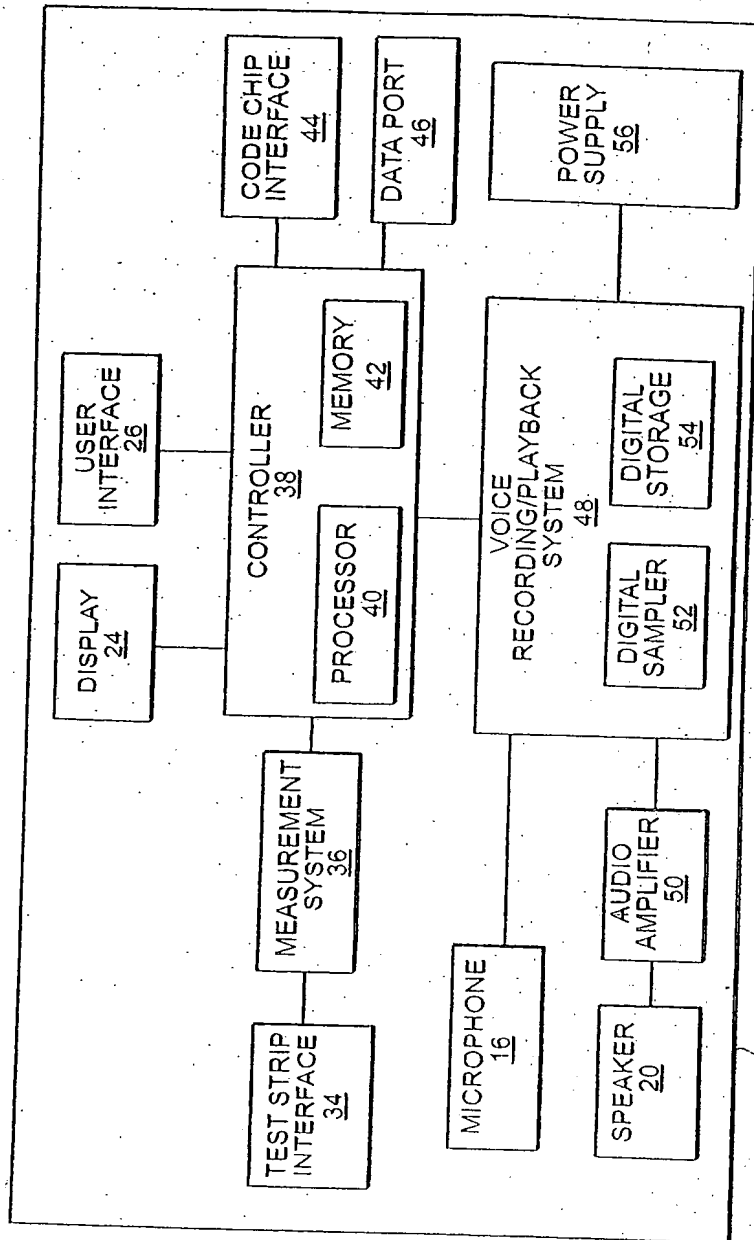


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US2005/002203

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61B 601N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/28416 A (HEALTHETECH, INC) 26 April 2001 (2001-04-26) page 3, line 10 - page 4, line 7 page 6, line 20 - page 9, line 14 page 14, line 23 - page 15, line 1 page 26, lines 4-17 page 27, lines 20-22 page 39, line 15 - page 41, line 14 page 46, lines 5-7 figure 21	1-5, 7-17, 19-30
X	EP 1 346 685 A (ARKRAY, INC) 24 September 2003 (2003-09-24) paragraphs '0013!', '0014! paragraphs '0017! - '0031!	1-4, 6, 7, 11-16, 18-20, 22, 23, 25-27, 29

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

13 April 2005

Date of mailing of the international search report

21/04/2005

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Postfach 2
M - 2200 HV Rijswijk
Tel: (+31-70) 340-2040, Tx: 31 651 eponl,
Fax: (+31-70) 340-3016

Authorized officer

Völlinger, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.
PCT/US2005/002203

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0128416	A	26-04-2001	
		AU 7715500 A	30-04-2001
		CA 2385573 A1	26-04-2001
		EP 1217942 A1	03-07-2002
		JP 2003521972 T	22-07-2003
		WO 0128416 A1	26-04-2001
		US 6790178 B1	14-09-2004
		AU 2112901 A	30-04-2001
		CA 2387124 A1	26-04-2001
		EP 1265524 A2	18-12-2002
		JP 2004513669 T	13-05-2004
		WO 0128495 A2	26-04-2001
		US 2002107433 A1	08-08-2002
		US 6478736 B1	12-11-2002
		US 2002062069 A1	23-05-2002
		AU 8007600 A	23-04-2001
		CA 2386811 A1	19-04-2001
		EP 1220637 A2	10-07-2002
		JP 2003517355 T	27-05-2003
		WO 0126535 A2	19-04-2001
		US 6571200 B1	27-05-2003
		AU 8015600 A	23-04-2001
		CA 2387137 A1	19-04-2001
		EP 1223861 A1	24-07-2002
		JP 2003511143 T	25-03-2003
		WO 0126547 A1	19-04-2001
		US 6612306 B1	02-09-2003
		AU 1801701 A	04-06-2001
		CA 2392509 A1	31-05-2001
		EP 1234265 A1	28-08-2002
		JP 2003534581 T	18-11-2003
		WO 0139089 A1	31-05-2001
		AU 3650001 A	31-07-2001
		CA 2397133 A1	26-07-2001
		EP 1250085 A2	23-10-2002
		JP 2004509652 T	02-04-2004
		WO 0152718 A2	26-07-2001
		US 2003065257 A1	03-04-2003
		US 2001049470 A1	06-12-2001
		AU 5983101 A	12-11-2001
		CA 2407993 A1	08-11-2001
		EP 1278455 A2	29-01-2003
		JP 2003531663 T	28-10-2003
		WO 0182789 A2	08-11-2001
		US 2001044588 A1	22-11-2001
		US 2002028995 A1	07-03-2002
		US 2001044581 A1	22-11-2001
		AU 7494201 A	03-12-2001
		EP 1283689 A2	19-02-2003
		WO 0189365 A2	29-11-2001
		US 2003226695 A1	11-12-2003
EP 1346685	A	24-09-2003	
		AU 2412702 A	11-06-2002
		EP 1346685 A1	24-09-2003
		US 2004039256 A1	26-02-2004
		CN 1477943 A	25-02-2004
		WO 0243590 A1	06-06-2002